

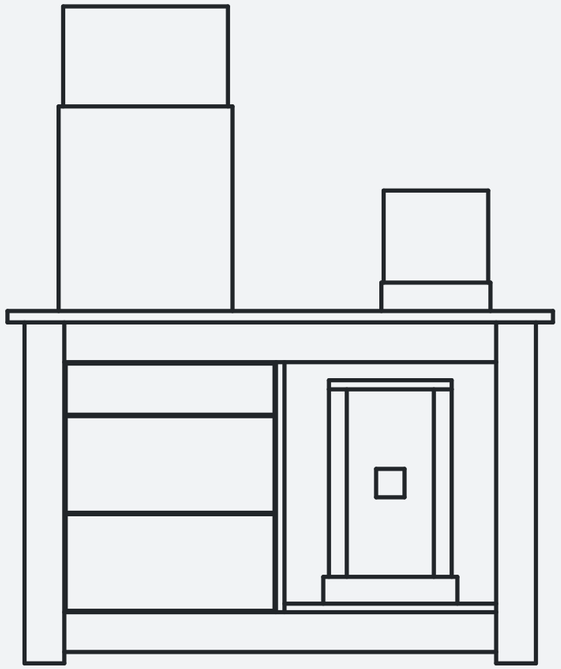


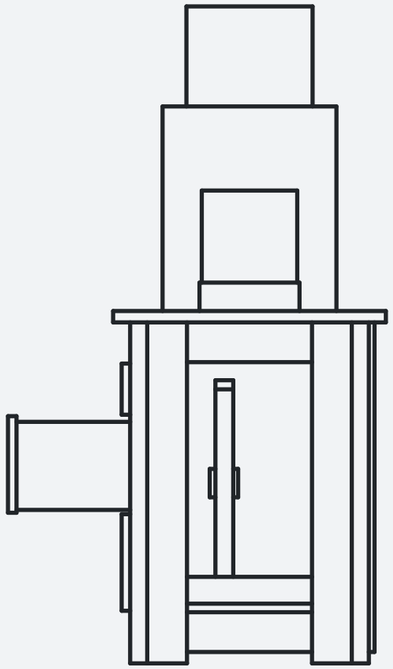

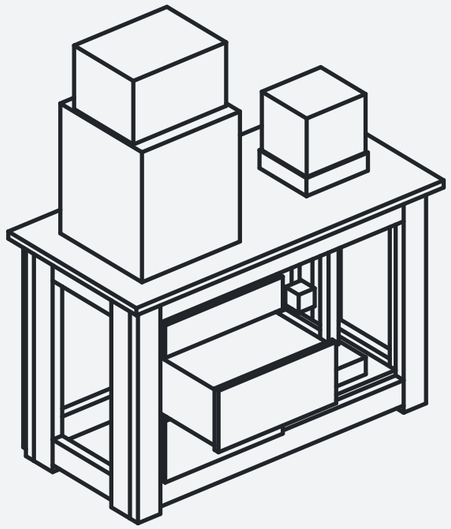

MASTER LUMBER & HARDWARE SCHEDULE (V3: L-SHAPED 2x4 LEGS - NO PLANER NEEDED)

PART NAME	QTY	MATERIAL	FINISHED SIZE (IN)	NOTES
Walnut Tabletop	1	1" Walnut	24.00" x 48.00" x 1"	Existing desktop; 1.5" overhang
L-Leg Front/Rear Flanges	4	2x4 SPF Lumber	1.50" x 3.50" x 30.00"	2x4 joined at 90° with pocket screws
L-Leg Side Return Flanges	4	2x4 SPF Lumber	1.50" x 3.50" x 30.00"	Factory-flat edges join flat face
Front/Back Upper Aprons	2	2x4 SPF Lumber	1.50" x 3.50" x 38.00"	Upper perimeter frame
Side Upper Aprons	2	2x4 SPF Lumber	1.50" x 3.50" x 11.00"	Upper side frame
Upper Center Cross-Tie	1	2x4 SPF Lumber	1.50" x 3.50" x 18.00"	Desktop mid support & divider anchor
Front/Back Lower Rails	2	2x4 SPF Lumber	1.50" x 3.50" x 38.00"	Lower stretchers 1.5" off floor
Side Lower Rails	2	2x4 SPF Lumber	1.50" x 3.50" x 11.00"	Lower side stretchers
Lower Center Cross-Tie	1	2x4 SPF Lumber	1.50" x 3.50" x 18.00"	Bottom shelf & divider support
Foot Corner Mount Blocks	4	2x4 Scrap	1.50" x 2.00" x 2.00"	Glued in L-corners for leveling feet
Rear Shear Wall Panel	1	1/2" Birch Ply	45.00" x 29.00" x 1/2"	SCREWED TO REAR; LOCKS AGAINST RACKING
Center Partition Gable	1	3/4" Birch Ply	18.00" x 22.00" x 3/4"	Separates drawer bank and CR-6 bay
Right Bay CR-6 Shelf	1	3/4" Birch Ply	18.00" x 18.625"x 3/4"	Houses Creality CR-6 SE 3D Printer
Spool Drawer Fronts	2	3/4" Walnut	8.500" x 18.375"x 3/4"	FLUSH MOUNTED; Holds 24 spools upright
Tool Drawer Front	1	3/4" Walnut	4.500" x 18.375"x 3/4"	Tools, nozzles, PEI build plates

WOODWORKING BLUEPRINTS
ALL UNITS: INCHES (") / DEGREES (°)

BAMBU 3D PRINTER STAND & WORKBENCH
L-SHAPED 2x4 LEGS + CR-6 & DUAL DRYER
3-TIER SPOOL DRAWERS & TECH BAY

Drawn: Scott Kirkwood

B	Code	Drawing Number	Rev
1:15	Weight	1 of 1	